


# 1.25 Gigabit Ethernet-Single Mode Transceiver



**SFP BIDI, Single LC Connector, 1310nm DFB LD for Single Mode Fiber, RoHS Compliant**  
*Digital Diagnostics Functions*



## Features

- 1310nm DFB LD
- Multi Data Rate: from 125M to 1.25Gbps, NRZ
- Single +3.3V Power Supply
- RoHS Compliant and Lead-free
- AC/AC Differential Electrical Interface
- Compliant with Multi-Source Agreement (MSA) Small Form Factor Pluggable (SFP)
- Compliant with SFF-8472 Digital Diagnostic Monitoring Interface
- Single LC Connector
- Compliance with specifications for IEEE-802.3z Gigabit Ethernet at 1.25 Gbps
- Compliance with ANSI specifications for Fibre Channel applications at 1.06 Gbps
- Eye Safety  
Designed to meet Laser Class 1 comply with EN60825-1

## Applications

- Gigabit Ethernet Links
- Fibre Channel Links at 1.06 Gbps
- High Speed Backplane Interconnects
- Switched Backbones

## Description

The CT-1250TBP-NB7L-D from Coretek Opto Corp. is the high performance and cost-effective module for serial optical data communication applications specified for single mode of multi-rate from 125M to 1.25 Gb/s. It operates with +3.3V power supply. The module is intended for single mode fiber, operates at a nominal wavelength of Tx: 1310nm / Rx: 1550nm and complies with Multi-Source Agreement (MSA) Small Form Factor Pluggable (SFP). Each module is integrated digital diagnostics functions via an I<sup>2</sup>C serial interface.

The module is a single fiber connector transceiver designed for use in Gigabit Ethernet applications and to provide IEEE-802.3z compliant link for 1.25Gb/s long reach applications. The characteristics are performed in accordance with Telcordia Specification GR-468-CORE.

## EMC

Most equipment utilizing high-speed transceivers will be required to meet the following requirements:

- 1) FCC in the United States
- 2) CENELEC EN55022 (CISPR 22) in Europe

To assist the customer in managing the overall equipment EMC performance, the transceivers have been designed to satisfy FCC class B limits and provide good immunity to radio-frequency electromagnetic fields.

## Eye Safety

The transceivers have been designed to meet Class 1 eye safety and comply with EN 60825-1.

# 1.25 Gigabit Ethernet-Single Mode Transceiver



## Product Information

| Model Number      | Operating Voltage & SD Output | Distance | Wavelength            | Output Power | Sensitivity    |
|-------------------|-------------------------------|----------|-----------------------|--------------|----------------|
| CT-1250TBP-NB7L-D | 3.3V TTL AC/AC                | 60 km    | 1310 nm DFB / 1550 nm | 0 ~ +5 dBm   | $\leq -25$ dBm |

## ABSOLUTE MAX RATINGS

| PARAMETER           | SYMBOL   | MIN | MAX      | UNIT               | NOTE |
|---------------------|----------|-----|----------|--------------------|------|
| Storage Temperature | $T_S$    | -40 | 85       | $^{\circ}\text{C}$ |      |
| Supply Voltage      | $V_{CC}$ | 0   | 6        | V                  |      |
| Data Input Voltage  | ---      | 0   | $V_{CC}$ | V                  |      |
| Supply Current      | $I_S$    |     | 300      | mA                 |      |

## OPERATING CONDITIONS

| PARAMETER                  | SYMBOL   | MIN. | TYP. | MAX. | UNIT               | NOTE |
|----------------------------|----------|------|------|------|--------------------|------|
| Case Operating Temperature | $T_A$    | 0    |      | 70   | $^{\circ}\text{C}$ |      |
| Supply Voltage             | $V_{CC}$ | 3.1  |      | 3.5  | V                  |      |
| Data Input Voltage Swing   | $V_{ID}$ | 300  |      | 1860 | mV                 |      |

## ELECTRICAL CHARACTERISTICS

| PARAMETER                                 | SYMBOL     | MIN                 | MAX                 | UNIT | NOTE |
|---|------------|---------------------|---------------------|------|------|
| <b>Transmitter</b>                        |            |                     |                     |      |      |
| Transmitter Supply Current                | $I_{CC_T}$ |                     | 200                 | mA   |      |
| Tx_Disable Input Voltage - Low            | $V_{IL}$   | 0                   | 0.8                 | V    |      |
| Tx_Disable Input Voltage - High           | $V_{IH}$   | 2.0                 | $V_{CC}$            | V    |      |
| Tx_Fault Output Voltage - Low             | $V_{OL}$   | 0                   | 0.8                 | V    |      |
| Tx_Fault Output Voltage - High            | $V_{OH}$   | 2.0                 | $V_{CC}$            | V    |      |
| <b>Receiver</b>                           |            |                     |                     |      |      |
| Receiver Supply Current                   | $I_{CC_R}$ |                     | 100                 | mA   |      |
| Receiver Data Output Differential Voltage | $V_{OD}$   | 0.4                 | 1.3                 | V    |      |
| Rx_LOS Output Voltage - Low               | $V_{OL}$   | 0                   | 0.8                 | V    |      |
| Rx_LOS Output Voltage - High              | $V_{OH}$   | 2.0                 | $V_{CC}$            | V    |      |
| MOD_DEF (1) , MOD_DEF (2) - Low           | $V_{IL}$   | -0.6                | $V_{CC} \times 0.3$ | V    |      |
| MOD_DEF (1) , MOD_DEF (2) - High          | $V_{IH}$   | $V_{CC} \times 0.7$ | $V_{CC} + 0.5$      | V    |      |

## TRANSMITTER ELECTRO-OPTICAL CHARACTERISTICS

| PARAMETER                    | SYMBOL           | MIN                            | TYP. | MAX  | UNIT  | NOTE |
|------------------------------|------------------|--------------------------------|------|------|-------|------|
| Optical Output Power         | $P_o$            | 0                              |      | 5    | dBm   | 1    |
| Extinction Ratio             | ER               | 9                              |      |      | dB    |      |
| Center Wavelength            | $\lambda_c$      | 1290                           | 1310 | 1325 | nm    |      |
| Spectral Width (-20dB)       | $\Delta \lambda$ |                                |      | 1    | nm    |      |
| Side Mode Suppression Ratio  | SMSR             | 30                             |      |      | dB    |      |
| RIN                          | RIN              |                                |      | -120 | dB/Hz |      |
| Optical Rise time (20%-80% ) | $t_r$            |                                |      | 260  | ps    | 2    |
| Optical Fall time (20%-80% ) | $t_f$            |                                |      | 260  | ps    | 2    |
| Output Eye                   |                  | Compliant with IEEE802.3z/D5.0 |      |      |       |      |

# 1.25 Gigabit Ethernet-Single Mode Transceiver



## RECEIVER ELECTRO-OPTICAL CHARACTERISTICS

| PARAMETER                                      | SYMBOL      | MIN  | TYP. | MAX  | UNIT | NOTE |
|--|-------------|------|------|------|------|------|
| Maximum Input Optical Power                    | $P_{max}$   | -3   |      |      | dBm  | 3    |
|  | 1.25Gb/s    |      |      | -25  |      | 3    |
|  | 1.06Gb/s    |      |      | -25  |      | 3    |
| Minimum Input Optical Power                    | $P_{min}$   |      |      |      | dBm  | 4    |
|  | 622Mb/s     |      |      | -25  |      | 4    |
|  | 155Mb/s     |      |      | -25  |      | 4    |
|  | 125Mb/s     |      |      | -25  |      | 3    |
| Operating Wavelength                           | $\lambda$   | 1480 |      | 1580 | nm   |      |
| Optical Return Loss                            | ORL         | 14   |      |      | dB   |      |
| Receiver Electrical 3dB Upper Cutoff Frequency | ---         |      |      | 1500 | MHz  |      |
| LOS of Signal - Asserted                       | $P_A$       | -35  |      |      | dBm  |      |
| LOS of Signal - Deasserted                     | $P_D$       |      |      | -24  | dBm  |      |
| Loss of Signal -Hysterisis                     | $P_D - P_A$ | 0.5  |      |      | dB   |      |


### Notes:

1. Measured average power coupled into 9/125  $\mu$  m single mode fiber.
2. These are 20-80% values.
3. Measured with  $2^7-1$  PRBS at BER< $10^{-12}$
4. Measured with  $2^{23}-1$  PRBS at BER< $10^{-10}$

## TIMING CHARACTERISTICS

| PARAMETER                                       | SYMBOL          | MIN | TYP. | MAX | UNIT    | NOTE |
|---|-----------------|-----|------|-----|---------|------|
| TX_DISABLE Assert Time                          | $t_{off}$       |     |      | 10  | $\mu$ s |      |
| TX_DISABLE Negate Time                          | $t_{on}$        |     |      | 1   | ms      |      |
| Time to initialize, include reset of TX_FAULT   | $t_{init}$      |     |      | 300 | ms      |      |
| TX_FAULT from fault to assertion                | $t_{fault}$     |     |      | 100 | $\mu$ s |      |
| TX_DISABLE time to start reset                  | $t_{reset}$     | 10  |      |     | $\mu$ s |      |
| Receiver Loss of Signal Assert Time (off to on) | $t_{A,RX\_LOS}$ |     |      | 100 | $\mu$ s |      |
| Receiver Loss of Signal Assert Time (on to off) | $t_{D,RX\_LOS}$ |     |      | 100 | $\mu$ s |      |


## BLOCK DIAGRAM OF TRANSCEIVER

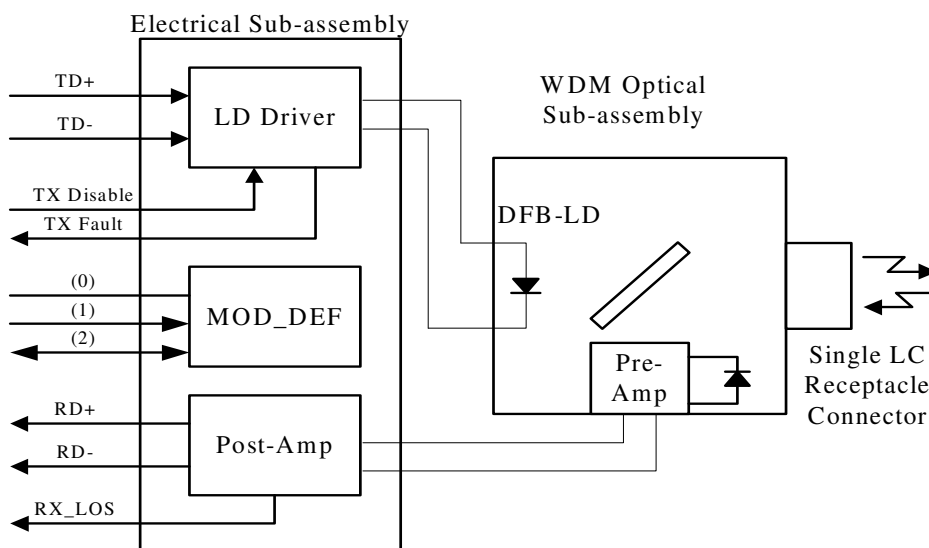

# 1.25 Gigabit Ethernet-Single Mode Transceiver



## PIN OUT DIAGRAM OF TRANSCEIVER

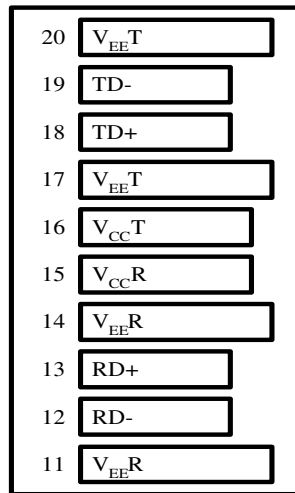

Top of Board



Bottom of Board (As Viewed through Top of Board)


## PIN OUT TABLE

| Pin | Symbol      | Functional Description                                |
|-----|-------------|---|
| 1   | VeeT        | Transmitter Ground                                    |
| 2   | TX Fault    | Transmitter Fault Indication                          |
| 3   | TX Disable  | Transmitter Disable – Module disables on high or open |
| 4   | MOD-DEF(2)  | Module Definition 2 – Two wire serial ID interface    |
| 5   | MOD-DEF(1)  | Module Definition 1 – Two wire serial ID interface    |
| 6   | MOD-DEF(0)  | Module Definition 0 – Grounded in module              |
| 7   | Rate Select | Not Connected   |
| 8   | LOS         | Loss of Signal  |
| 9   | VeeR        | Receiver Ground                                       |
| 10  | VeeR        | Receiver Ground                                       |
| 11  | VeeR        | Receiver Ground                                       |
| 12  | RD-         | Inverse Received Data Out                             |
| 13  | RD+         | Received Data Out                                     |
| 14  | VeeR        | Receiver Ground                                       |
| 15  | VccR        | Receiver Power  |
| 16  | VccT        | Transmitter Power                                     |
| 17  | VeeT        | Transmitter Ground                                    |
| 18  | TD+         | Transmitter Data In                                   |
| 19  | TD-         | Inverse Transmitter Data In                           |
| 20  | VeeT        | Transmitter Ground                                    |

# 1.25 Gigabit Ethernet-Single Mode Transceiver




## RECOMMENDED CIRCUIT SCHEMATIC

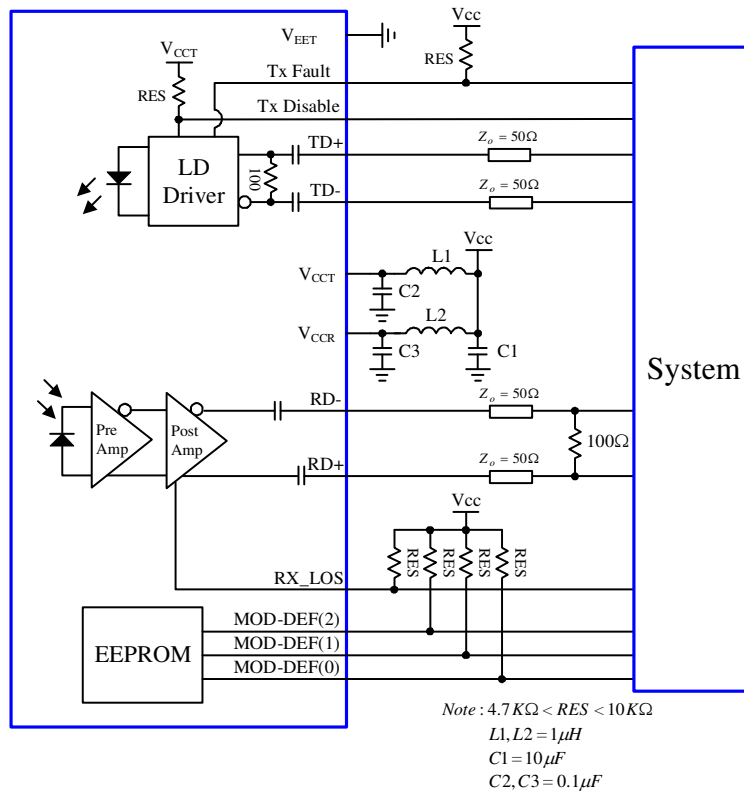

## MECHANICAL DIMENSIONS

Units in mm

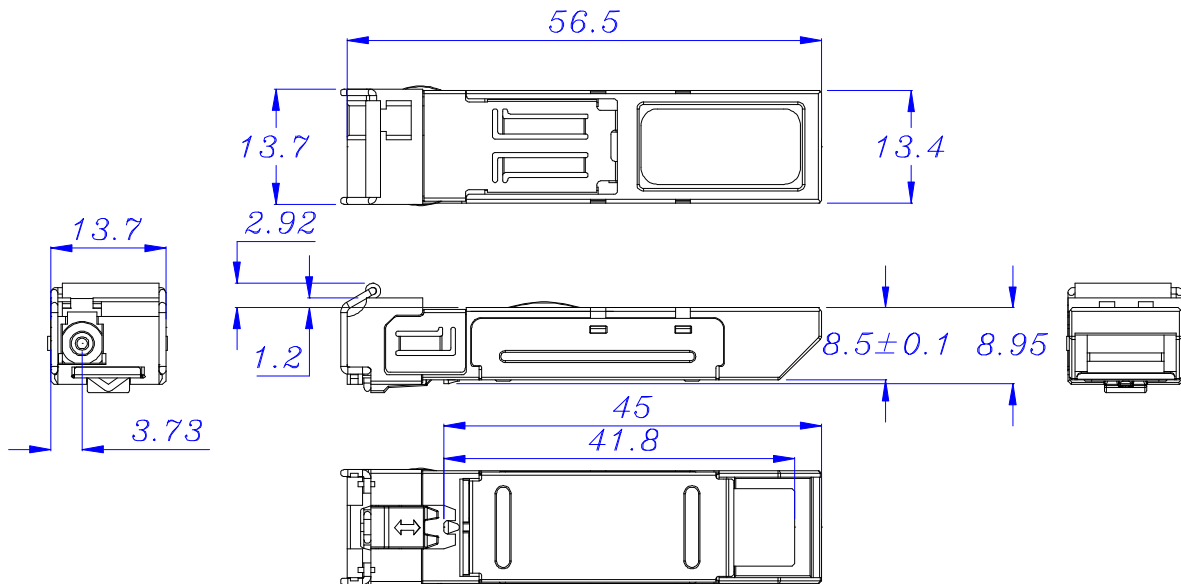

All dimensions are  $\pm 0.2\text{mm}$  unless otherwise specified.

### Claim:

CORETEK Opto Corp. reserves the right to make changes in the specification described hereinafter without prior notice.